

# Vandal Resistant Switch (Без подсветки)

Φ16mm



- Anti-Vandal IK09/ Sealed IP65
- Normal Open
- Domed/ Flat/ High Flat Front
- Stainless Steel/ Brass
- 1,000,000 cycles momentary



16-mm Type: H-1-S

16-mm Type: B-1-G


## Order Code

Series	Actuator Options	Terminal	Function	Material Finish	Marking Options
16-mm Non-Illuminated	F - Flat H - High B - Domed	P- Pin(2.8x0.5) Screw: blank	Momentary: 1- NO 2- NC	G- *Gold N- Nickel A- *Anodized aluminum S- Stainless Steel N- Natural color P- Polished Brushed blank	Custom Markings Available


## Function



## Panel Cutout

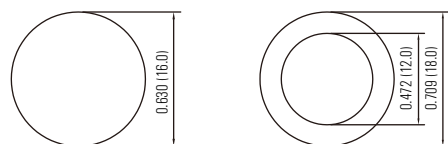

Max. Panel Thickness: 0.236 (6mm)

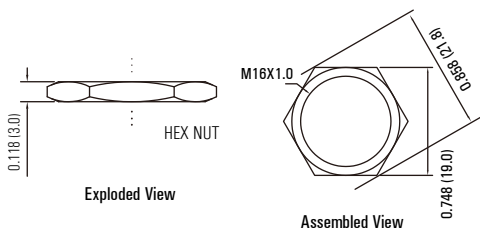


## Technical Data

Type	16-mm Type F	16-mm Type B	16-mm Type H
Front Shape	Flat	Domed	High Flat
Terminal	Screw/ Pin(2.8X0.5)		
Max. Switch Rating	2A 48VDC		
Contact Resistance	≤ 50m Ω		
Insulation Resistance	≥ 1000m Ω		
Dielectric Strength	2000VAC		
Operation Temp.	-20 C ~ +55 C		
Mechanical Life	1,000,000cycles		
Electrical Life	200,000cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	approx. 4N		
Protection	IP65/ IK09		
Material			
Actuator	Stainless Steel/ *Gold plated Brass/ *Anodized Aluminum		
Body	Stainless Steel/ Nickel plated brass/ *Gold plated Brass/ *Anodized Aluminum		
Base	PBT		


\*Material can be customized.

## Dimension


### Screw




16-mm Type H




16-mm Type B




16-mm Type F




### Solder



16-mm Type H/P



16-mm Type B/P



16-mm Type F/P

