

# Vandal Resistant Switch

Ø19mm



- Anti-Vandal IK09/ Sealed IP65
- Illuminated and Non-Illuminated
- Variety of colors
- Momentary/ Latching



Momentary: Без фиксации  
Latching: С фиксацией

## Order Code

Series	Actuator Options	Terminal	Function	Material Finish	Illuminated Options	Color	Voltage	Marking Options
19A	F-Flat	Pin(2.8x0.5) blank	M- Momentary 1 1N01NC 2 2N02NC Z- Latching 1 1N01NC 2 2N02NC	S- Stainless Steel A- Anodized Aluminum	D-Dot R-Ring Non-illuminated blank	W- White Y- Yellow B- Blue G- Green R- Red O- Orange	6V 12V 24V 36V 110V 230V	Custom Markings Available




## Technical Data


Type	19A-F	19A-F/R	19A-F/D
Illuminated Options	Non-Illuminated	Ring	Dot
Terminal	Pin(2.8x0.5)		
Max. Switch Rating	5A 250VAC		
Contact Resistance	≤ 50m Ω		
Insulation Resistance	≥ 1000m Ω		
Dielectric Strength	2000VAC		
Operation Temp.	-20 C ~ +55 C		
Mechanical Life	1,000,000cycles		
Electrical Life	200,000cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	3 ~ 5N		
Protection	IP65/ IK09		
Material			
Actuator	Stainless Steel/ *Anodized Aluminum		
Body	Stainless Steel/ *Anodized Aluminum		
Base	PBT		
Color			
Type	LED		
Voltage	6V/ 12V/ 24V/ 36V/ 110V/ 230V		
Color	R G Y O B W		
Life	Approx. 40, 000hours		

\*Material and Color voltage can be customized.



## Operation





## Description




## Suggested Panel Cutout



Max. Panel Thickness: 0.394 (10.0)



## Dimension

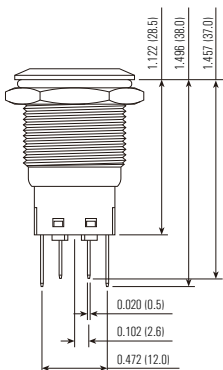

Size Tolerance: ±0.1mm

