

Vandal Resistant Switch (Без фиксации)

Ø19mm



- Anti-Vandal IK09/ Sealed IP65
- Normal Open/ Normal Closed
- Domed/ Flat/ High Flat Front
- Stainless Steel/ Brass
- 1,000,000 cycles momentary



19v-H-1-S

19v-B-1-G


Order Code

Series	Actuator Options	Terminal	Function	Material Finish	Marking Options
19v	F- Flat H- High B- Domed	P- Pin(2.8x0.5) Screw blank	Momentary: 1- NO 2- NC	G- *Gold N- Nickel A- *Anodized aluminum S- Stainless Steel N- Natural color P- Polished Brushed blank	Custom Markings Available


Function



Panel Cutout

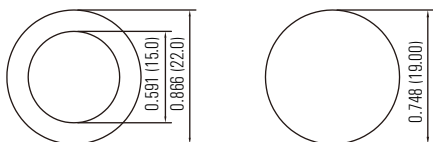

Max. Panel Thickness: 0.315 (8mm)

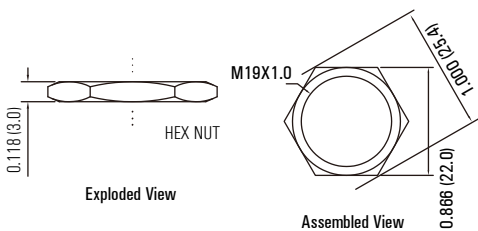



Technical Data

Type	19v-F	19v-B	19v-H
Front Shape	Flat	Domed	High Flat
Terminal	Screw/ Pin(2.8X0.5)		
Max. Switch Rating	2A 48VDC		
Contact Resistance	≤ 50m Ω		
Insulation Resistance	≥ 1000m Ω		
Dielectric Strength	2000VAC		
Operation Temp.	-20 C ~ +55 C		
Mechanical Life	1,000,000cycles		
Electrical Life	200,000cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	approx. 5N		
Protection	IP65/ IK09		
Material			
Actuator	Stainless Steel/ Nickel plated brass/ *Gold plated Brass/ *Anodized Aluminum		
Body	Stainless Steel/ Nickel plated brass/ *Gold plated Brass/ *Anodized Aluminum		
Base	PBT		

*Material can be customized.

Dimension

Screw

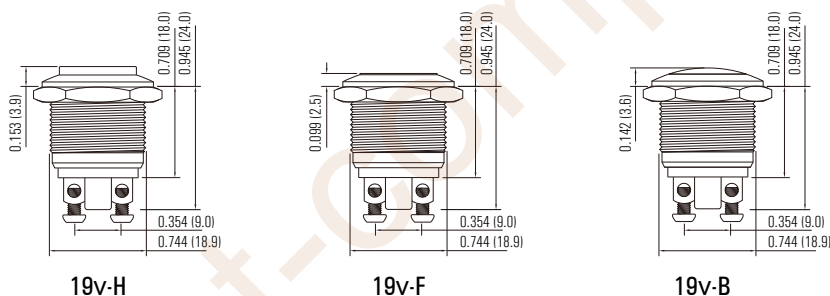

Solder

