

Vandal Resistant Switch (Без подсветки, без фиксации)

Ø22mm




- Anti-Vandal IK09/ Sealed IP65
- Normal Open/ Normal Closed
- Domed/ Flat/ High Flat Front
- Stainless Steel/ Brass
- 1,000,000 cycles momentary




22v-F-1-S

22v-P-1-S


Order Code

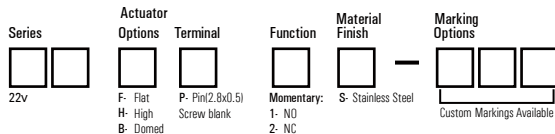


Function



Panel Cutout

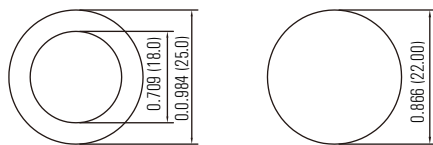

Max. Panel Thickness: 0.315 (8mm)

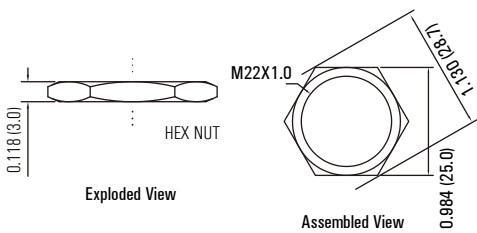

Technical Data


Type	22v-F	22v-B	22v-H
Front Shape	Flat	Domed	High Flat
Terminal	Screw/ Pin(2.8X0.5)		
Max. Switch Rating	2A 48VDC		
Contact Resistance	≤ 50mΩ		
Insulation Resistance	≥ 1000mΩ		
Dielectric Strength	2000VAC		
Operation Temp.	-20 C ~ +55 C		
Mechanical Life	1,000,000cycles		
Electrical Life	200,000cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	approx. 5.5N		
Protection	IP65/ IK09		
Material			
Actuator	Stainless Steel		
Body	Stainless Steel		
Base	PBT		

*Material can be customized.


Dimension

Screw


Solder




22v-H




22v-F




22v-B



22v-H-P



22v-F-P



22v-B-P