


Push-Button Switch

PBS Series



Ordering Information

PBS-10B-2

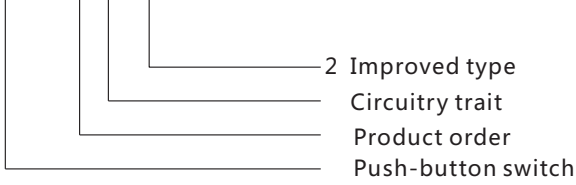

Specification

1. Rating: 3A 125VAC; 1A 250VAC
2. Contact Resistance: 20mΩ max
3. Insulation Resistance: 500VDC 100MΩ min
4. Dielectric Strength: 1000VAC, 1Minute
5. Operating Temperature: -25°C ~ +85°C
6. Electrical Life: 50,000 Cycles

Circuitry trait

A	ON - OFF	Push on/Push off	With lock
B	(ON) - OFF	Push on	Momentary(Open type)
C	ON - (OFF)	Push off	Momentary(Close type)

(): 回弹指示 Indicates Momentary



Push-button color

Red	White
Green	Black
Orange	Yellow
Blue	

	<p>PBS-11A ON-OFF PBS-11B OFF-(ON) PBS-11C ON-(OFF)</p>	
	<p>PBS-12A ON-OFF PBS-12B OFF-(ON) PBS-12C ON-(OFF)</p>	
	<p>PBS-14A ON-OFF PBS-14B OFF-(ON) PBS-14C ON-(OFF)</p>	
	<p>PBS-16A ON-OFF PBS-16B OFF-(ON) PBS-16C ON-(OFF)</p>	


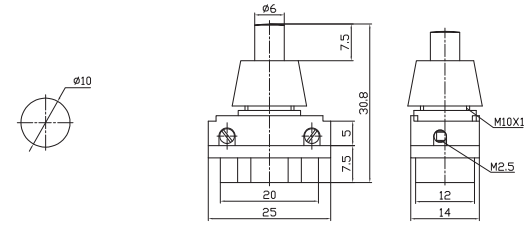

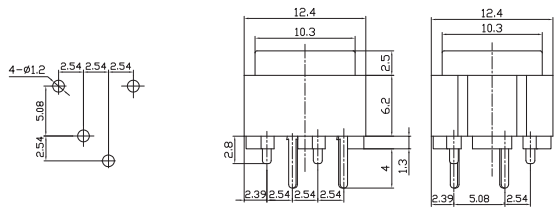

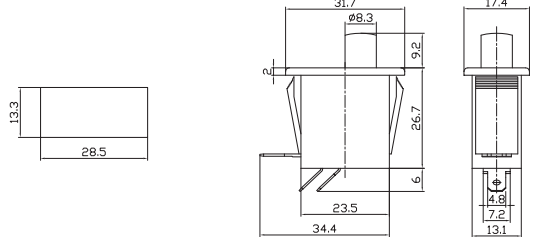

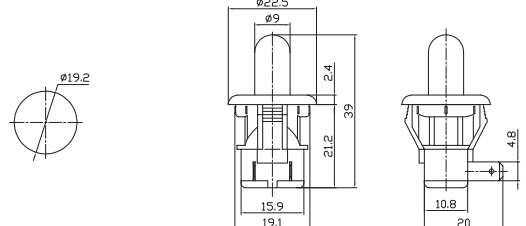

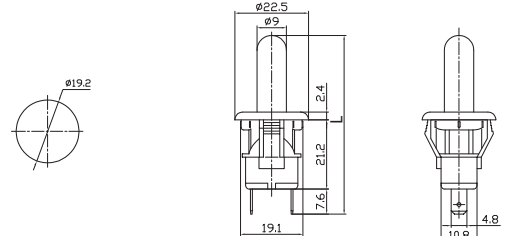

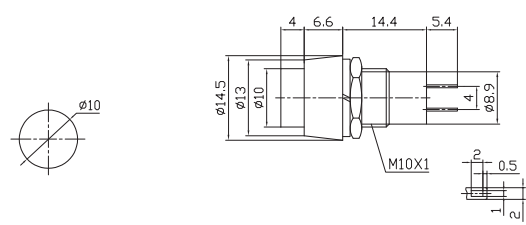

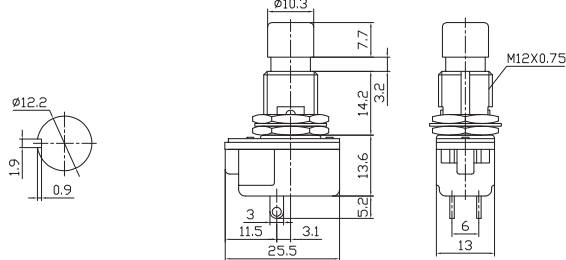
Push-Button Switch

PBS Series

	<p>PBS-13B OFF-(ON) PBS-13C ON-(OFF) 8A 125VAC; 4A 250VAC</p>	
	<p>WPC-13 M12 x 0.75</p>	
	<p>PBS-10B OFF-(ON) (Plastic rod)</p>	
	<p>PBS-10B-2 OFF-(ON) PBS-10C-2 ON-(OFF) (Metal rod)</p>	
	<p>PBS-15A ON-OFF</p>	
	<p>PBS-15B OFF-(ON) PBS-15C ON-(OFF)</p>	
	<p>PBS-17A ON-OFF 4A 125VAC; 2A 250VAC</p>	
	<p>PBS-17A-2 ON-OFF (原PBS-17B)</p>	

































Push-Button Switch

PBS Series

	<p>PBS-17A-3 ON-OFF 4A 125VAC;2A 250VAC</p>	
	<p>PBS-18B OFF-(ON) 25mA 50VACorDC</p>	
	<p>PBS-19-111 ON-(OFF) SPST 2P PBS-19-112 ON-(ON) SPDT 3P 6A 250VAC;10A 125VAC</p>	
	<p>PBS-19B OFF-(ON) PBS-19C ON-(OFF) 5A 125VAC;2.5A 250VAC</p>	
	<p>PBS-19B-2 OFF-(ON) PBS-19C-2 ON-(OFF) L=54.6 PBS-19B-3 OFF-(ON) PBS-19C-3 ON-(OFF) L=44.6 5A 125VAC;2.5A 250VAC</p>	
	<p>PBS-20A-2 ON-OFF PBS-20B-2 OFF-(ON)</p>	
	<p>PBS-24B-2 OFF-(ON) PBS-24C-2 ON-(OFF) 10A 125VAC;6A 250VAC SPST 2P</p>	


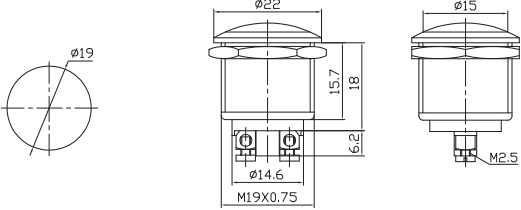
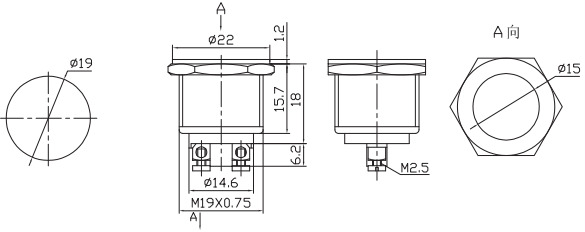

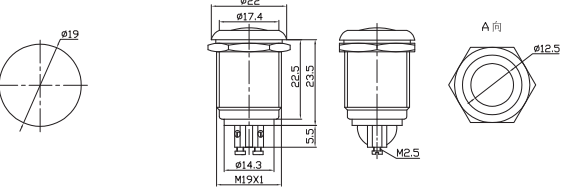

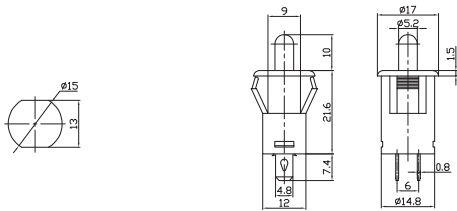

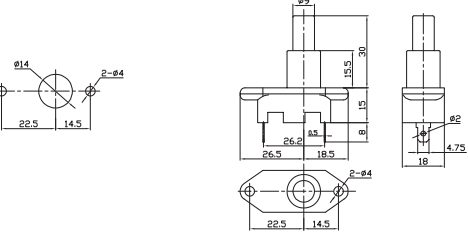

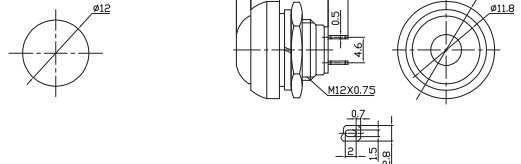

Push-Button Switch

PBS Series

	<p>PBS-24A-3 ON-OFF 6A 250VAC;10A 125VAC</p>			
	<p>PBS-24B-3 (ON)-OFF 6A 250VAC;10A 125VAC</p>			
	<p>PBS-24B-4 OFF-(ON) 2A 250VAC;4A 125VAC</p>			
	<p>PBS-24-102 ON-ON PBS-24-112 ON-(ON) 2A 250VAC;4A 125VAC SPDT 3P (L=14.2, 11.8, 9.8)</p>			
	<p>PBS-24-202 ON-ON PBS-24-212 ON-(ON) 2A 250VAC;4A 125VAC DPDT 6P (L=14.2, 11.8, 9.8)</p>			
	<p>PBS-24-102P ON-ON PBS-24-112P ON-(ON) 2A 250VAC;4A 125VAC SPDT 3P (PC terminal) (L=14.2, 11.8, 9.8)</p>			
	<p>PBS-24-202P ON-ON PBS-24-212P ON-(ON) 2A 250VAC;4A 125VAC DPDT 6P (PC terminal) (L=14.2, 11.8, 9.8)</p>			
	<p>PBS-26B OFF-(ON) PBS-26C ON-(OFF) 4A 125VAC;2A 250VAC</p>			

Push-Button Switch

PBS Series

	<p> PBS-28B OFF-(ON) PBS-28C ON-(OFF) PBS-28B-W OFF-(ON) PBS-28C-W ON-(OFF) 4A 125VAC;2A 250VAC "W" Means The Switch Has Waterproof Rubber Ring(IP66) </p>	
	<p> PBS-28B-2 OFF-(ON) PBS-28C-2 ON-(OFF) PBS-28B-2-W OFF-(ON) PBS-28C-2-W ON-(OFF) 4A 125VAC;2A 250VAC "W" Means The Switch Has Waterproof Rubber Ring(IP66) </p>	
	<p> PBS-28B-3 OFF-(ON) 4A 125VAC;2A 250VAC IP66 With Waterproof Rubber Ring </p>	
	<p> PBS-29B OFF-(ON) </p>	
	<p> PBS-32B OFF-(ON) 10A 125VAC;6A 250VAC </p>	
	<p> PBS-33B OFF-(ON) </p>	
	<p> PBS-34B OFF-(ON) 10A 125VAC;6A 250VAC </p>	