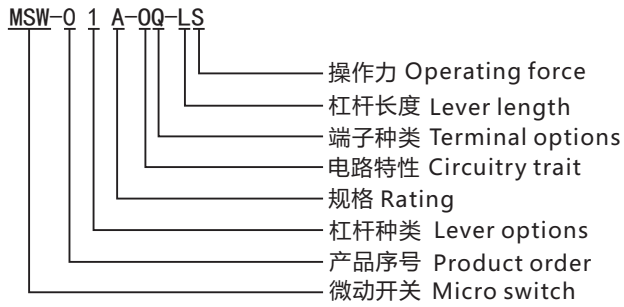


Micro Switch

MSW Series



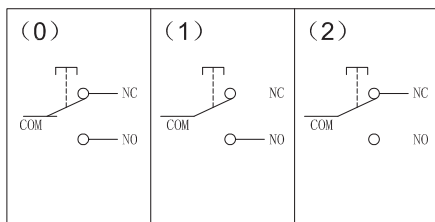
Ordering Information



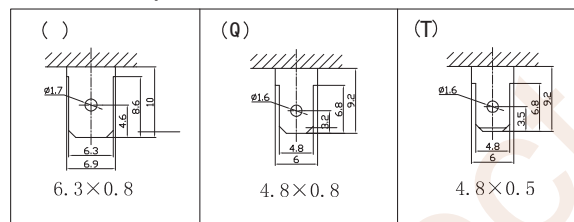
Specification

- 规格 Rating: () 10A 125/250VAC
(A) 16A 125/250VAC
(B) 5A 125/250VAC
- 接触电阻 Contact Resistance: 20mΩ max
- 绝缘电阻 Insulation Resistance: 500VDC 100MΩ min
- 耐电压 Dielectric Strength: 1500VAC, 1Minute
- 环境温度 Ambient Temperature: -25°C ~ +85°C
- 电气寿命 Electrical Life: 100,000 Cycles

Circuitry trait



















Terminal options



Operating force

L : 35g±15g
S: 160g±40g
H: 320g±80g

	<p>MSW-01 ON-(ON) 10A 125/250VAC MSW-01A ON-(ON) 16A 125/250VAC SPDT 3P</p>			
	<p>MSW-02 ON-(ON) 10A 125/250VAC MSW-02A ON-(ON) 16A 125/250VAC SPDT 3P L=13; 27; 38; 53</p>			
	<p>MSW-03 ON-(ON) 10A 125/250VAC MSW-03A ON-(ON) 16A 125/250VAC SPDT 3P L=12; 25</p>			
	<p>MSW-04 ON-(ON) 10A 125/250VAC MSW-04A ON-(ON) 16A 125/250VAC SPDT 3P</p>			

Micro Switch


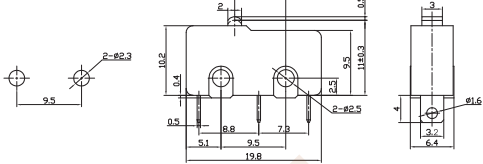

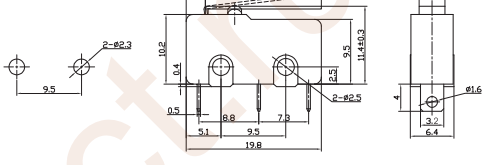

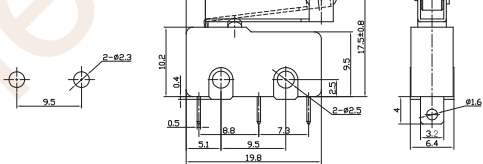

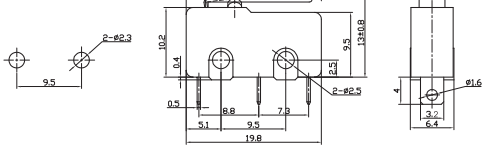
MSW Series

MSW-1 Series

Specification

- 1.规格 Rating:() 5A 125/250VAC
(B) 3A 125/250VAC
- 2.接触电阻 Contact Resistance:30mΩmax
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩmin

- 4.耐电压 Dielectric strength:1500VAC, 1Minute
- 5.环境温度 Ambient Temperature:-25°C ~ +80°C
- 6.电气寿命 Electrical Life:100,000 Cycles


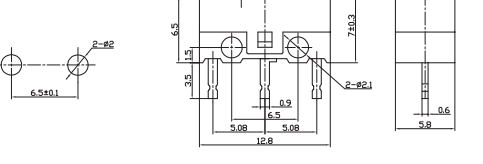

	<p>MSW-11 ON-(ON) 5A 125/250VAC MSW-11B ON-(ON) 3A 125/250VAC SPDT 3P</p>	
	<p>MSW-12 ON-(ON) 5A 125/250VAC MSW-12B ON-(ON) 3A 125/250VAC SPDT 3P</p>	
	<p>MSW-13 ON-(ON) 5A 125/250VAC MSW-13B ON-(ON) 3A 125/250VAC SPDT 3P</p>	
	<p>MSW-14 ON-(ON) 5A 125/250VAC MSW-14B ON-(ON) 3A 125/250VAC SPDT 3P</p>	

MSW-2 Series

Specification

- 1.规格 Rating:1A 125/250VAC
- 2.接触电阻 Contact Resistance:30mΩmax
- 3.绝缘电阻 Insulation Resistance:250VDC 100MΩmin

- 4.耐电压 Dielectric strength:1000VAC, 1Minute
- 5.环境温度 Ambient Temperature:-25°C ~ +65°C
- 6.电气寿命 Electrical Life:30,000 Cycles

	<p>MSW-21 1A 125/250VAC SPDT 3P</p>	
	<p>MSW-22 1A 125/250VAC SPDT 3P</p>	